

DK-6


DK-6 with plastic hose connector



DK-6 with metal hose connector




DK-6 has 2 air inlets and 1 liquid inlet

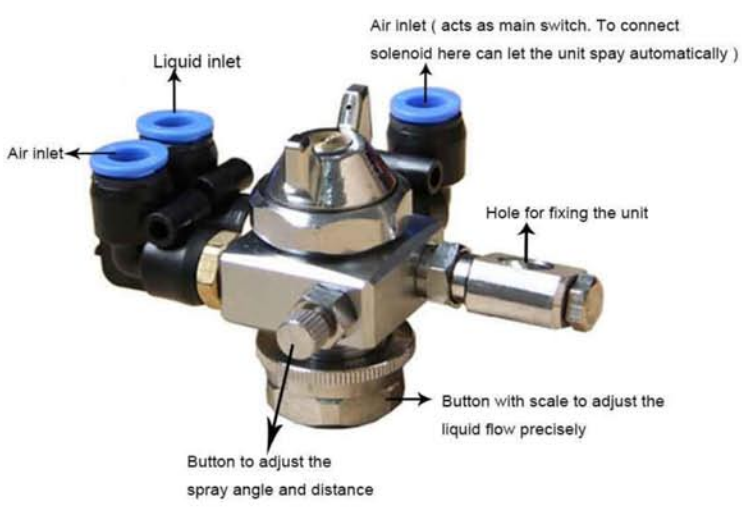

DK-5

DK-5 has 1 air inlet and 1 liquid inlet

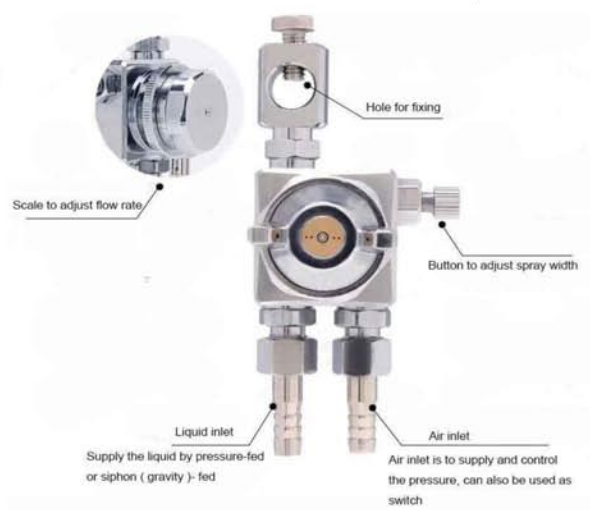

Performance Data

Style No.	Spray orifice dia.(mm)	Product Feature	Spray pattern	Spray orifice dia. (mm)	Liquid flow (ml/min)	Air consumption (L/min)	Widest spray width (mm)
DK-5-1	0.5	Standard model, which can be applied to various purposes. Normal working air pressure is between 0.3-0.4 Mpa. When air pressure drops to 0.2 Mpa, Needle valve will stop working to prevent liquid from leaking out. This model is more suitable for enclosed and narrow space.	Spray pattern is adjustable. It can be adjusted from oval spray pattern to round pattern.	0.5	0-60	60	200
DK-5-2	1.0			1.0	0-250	80	250
DK-5-3	1.3			1.3	0-360	100	350
DK-5-4	2.0			2.0	0-600	140	400
DK-6-1	0.5	This model works at low pressure. Normal working air pressure is between 0.15-0.4 Mpa. Needle valve will be not affected by atomizing air pressure. It needs a air valve control switch to control the needle to prevent liquid from leaking out. This model is more suitable for covering wide area or concave edge.		0.5	0-60	60	200
DK-6-2	1.0			1.0	0-250	80	250
DK-6-3	1.3			1.3	0-360	100	350
DK-6-4	2.0			2.0	0-600	140	400